
EUROLIGHT



Video HF 2000m

XW-HDU060 system is designed for transmitting uncompressed 1080P HD SDI/SDI video and audio from any camera to field monitors in 2000m (LOS).

Reference: XW-HDU060 EAN13: -

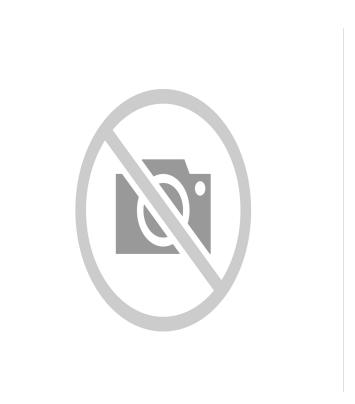

XW-HDU060 system is designed for transmitting uncompressed 1080P HD SDI/SDI video and audio from any camera to field monitors in 2000m (LOS). It works on 5.1GHz \sim 5.9GHz band radio frequencies and there are $0\sim9$, total 10 frequency points for selection.

With high efficiency flat patch antenna, it transmits uncompressed video in 2000m LOS with less than 1ms latency.

It supports full duplex intercom and wireless tally when works with accessory XW-TI.

Caractéristiques :

Compatibilité: Wireless intercom and tally signal return available Distance: 2000m(LOS) uncompressed video transmission with flat patch antenna Latence: less than 1ms Input: HD/SD SDI input & two SDI outputs available